




For short systems on jib cranes and monorails (width can be adjusted on site) low installation cost.

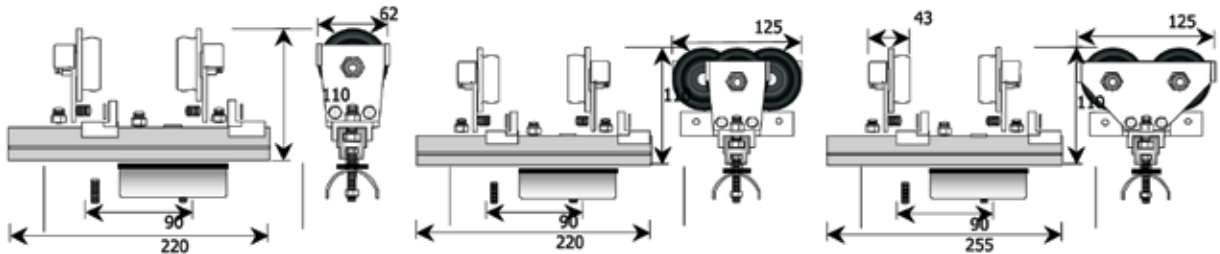

3-IB/MDA-*	Anchor
3-IB/MD2W-*	2 Wheel carrier
3-IB/MD3W-*	3 wheel carrier
3-IB/MD4W-*	4 wheel carrier
3-IB/MD M-*	Master box

***-Materials**

Code V = vesconite wheel
Code MS = zinc plated mild steel with bearing
Code SS = stainless steel with rubber bearings

(Adjustment rail is aluminium for all types)

Technical

- 3.11 Anchor is supplied with 8mm bolts for mounting on I-beam. Alternatively girder clips can be supplied
- 4.11 A light leader chain or cable is recommended to avoid damage to the power cable which can lead to single phasing on the electric motor.
- 5.11 2 wheel type should not be used on beams wider than 90mm to avoid possibilities of crabbing.

Options - Anti-tip rollers can be fitted on requ est.

- Note**
- When designing a festoon system, the ambush area/parking area must be taken into account.
 - The carrier width can be adjusted to suit any beam size.
 - Specify beam width when ordering.