




6x36 (14/7+7/7/1)/F

- Supplied with manufacturers' certificate.
- All ropes manufactured to British standards 302.
- Galvanised rope lubricated with light dry lubrication.
- Also used for the manufacture of slings.

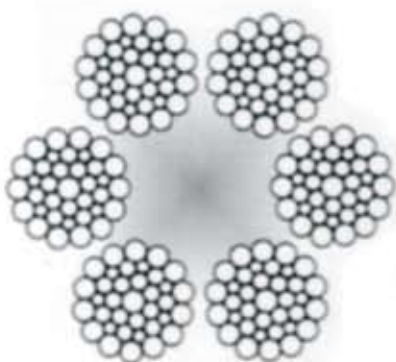

Nominal Rope Dia mm	Estimated Mass (kg/m)	Estimated Breaking Force (kn)		Outer Wire Diameter mm
		1800Mpa	1960 Mpa	
8	0.25	38	42	0.44
10	0.40	61	61	0.56
12	0.56	87	95	0.66
13	0.66	103	111	0.72
14	0.77	119	132	0.78
16	1.01	156	167	0.90
18	1.26	197	216	1.00
19	1.43	221	243	1.06
20	1.56	242	269	1.12
22	1.91	297	319	1.24
24	2.20	342	379	1.32
26	2.60	406	444	1.44
28	3.06	480	513	1.56
32	4.01	627	773	1.80
36	5.00	784	844	2.00
38	5.55	873	941	2.12
40	6.19	972	-	2.24
42	6.91	1086	-	2.36
44	7.57	1194	-	2.48
48	9.01	1418	-	2.70
50	9.68	1525	-	2.80
52	10.45	1643	-	2.90
56	12.15	1921	-	3.15
60	13.91	2201	-	3.35
64	15.85	2507	-	3.60

6x36 (14/7+7/7/1)/IWRC

- Supplied with manufacturers' certificate.
- All ropes manufactured to British standards 302.
- Galvanised rope lubricated with light dry lubrication.
- Also used for the manufacture of slings.



Nominal Rope Dia mm	Estimated Mass (kg/m)	Estimated Breaking Force (kn)		Outer Wire Diameter mm
		1800Mpa	1960 Mpa	
8	0.28	42	46	0.44
9	0.36	54	59	0.60
10	0.44	68	73	0.56
11	0.52	80	85	0.60
12	0.63	96	104	0.66
13	0.74	114	122	0.72
14	0.86	131	144	0.78
16	1.13	172	182	0.90
18	1.41	217	236	1.00
19	1.59	244	264	1.06
20	1.75	269	292	1.12
22	2.12	327	347	1.24
24	2.55	393	413	1.36
26	2.91	449	481	1.44
28	3.42	529	560	1.56
32	4.47	692	731	1.80
36	5.58	865	921	2.00
38	6.20	963	1026	2.12
40	6.90	1070	-	2.24
42	7.72	1200	-	2.36
44	8.47	1318	-	2.48
48	10.05	1564	-	2.70
50	10.76	1676	-	2.80
52	11.65	1816	-	2.90
56	13.59	2119	-	3.15
60	15.54	2427	-	3.35
64	17.71	2766	-	3.60