



**Commercial wire rope clamps**

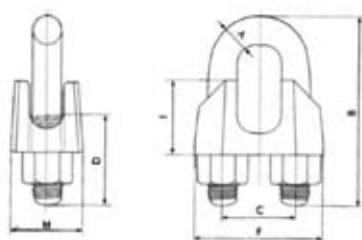

Wire Rope Dia	U-Bolt Dia	Overall Length of U-bolt	Inside width	Length of thread	Length of base	Thick-ness of base	Hight of base	Aprox weight per 100 pcs
mm	A	B	C	D	F	H	I	KG
3	4	20	9	12	21	10	10	14
5	5	24	11	13	23	11	10	15
6	5	28	13	15	26	12	11	21
8	6	34	16	19	30	14	15	41
10	8	42	19	22	34	18	17	68
13	10	55	24	30	42	23	21	130
16	12	63	29	33	50	26	26	210
19	12	75	32	38	54	29	30	280
22	14	85	37	44	61	33	34	400
24	14	95	41	45	65	35	37	440
30	16	110	48	50	74	37	43	660
34	16	120	52	55	80	42	50	850
36	16	140	58	60	88	45	55	1040

**To U.S. Fed. Spec. FF-C-450**

- Drop forged
- Material :SAE 1035, high tensile steel
- Finish :Hot dipped galvanized

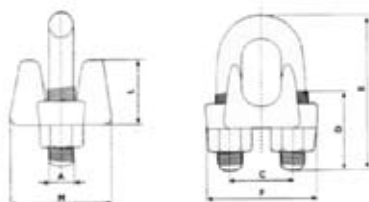

Wire Rope Dia	U-Bolt Dia	Overall Length of U-bolt	Inside width	Length of thread	Length of base	Thick-ness of base	Hight of base	Aprox weight per 100 pcs
mm	A	B	C	D	F	H	I	KG
3	5	24	12	10	28	22	14	4
5	6	31	16	11	32	26	16	6
6	8	34	19	13	37	30	17	8
8	10	45	22	19	43	33	18	14
10	11	49	26	19	49	42	23	19
13	13	51	30	26	58	48	29	34
16	14	74	33	32	64	52	34	45
19	16	86	38	37	72	57	36	68
22	19	98	45	42	80	62	41	108
25	19	108	48	46	88	67	45	113
28	19	117	51	51	91	71	48	140
32	22	130	59	54	105	79	56	207
38	22	147	66	60	113	87	64	266
41	26	161	70	67	121	92	67	329
44	29	175	78	70	134	97	75	441
50	32	196	86	76	149	113	83	803
53	32	220	98	81	162	116	100	707
63	32	227	105	87	168	119	113	806
69	32	243	112	91	174	127	124	1000
75	38	271	121	98	194	135	136	1440